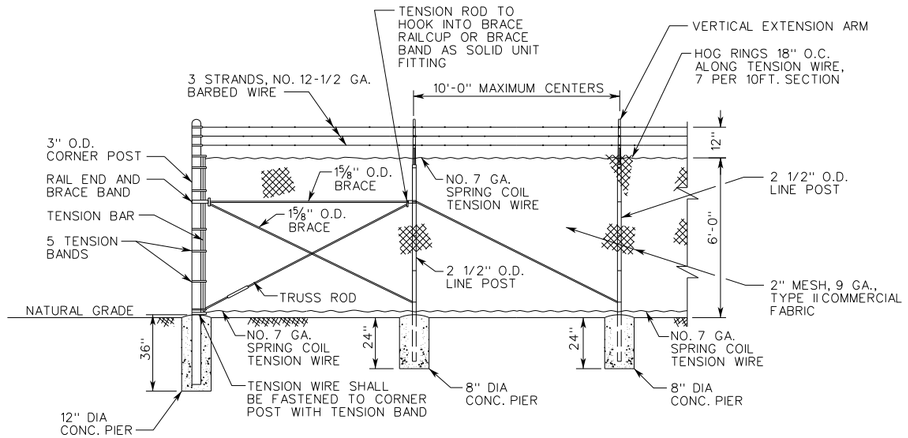

1 — TYPICAL FENCE CORNER AND LINE POST DETAIL

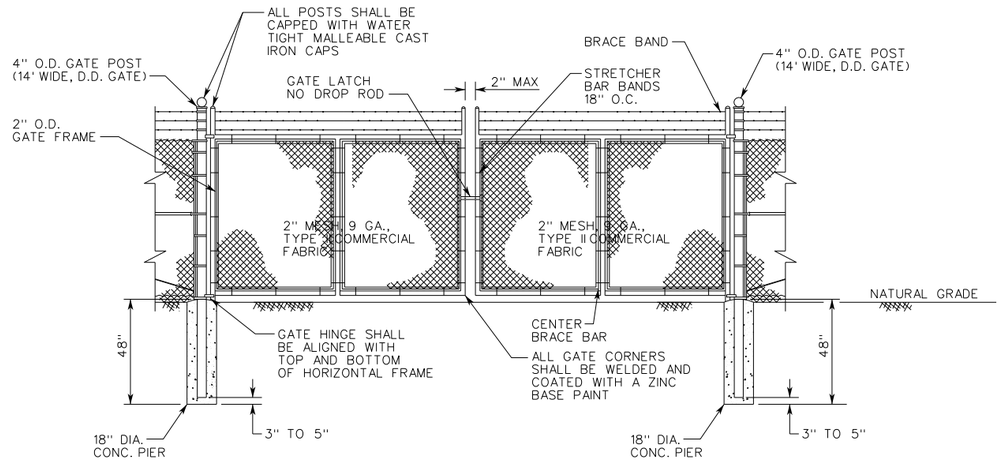

2 — 14'-0" WIDE DOUBLE DRIVE GATE

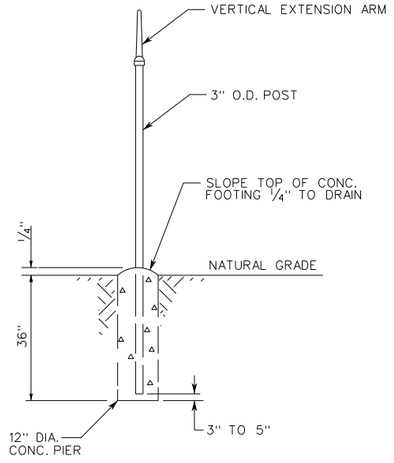

3 — CORNER AND PULL POST DETAIL

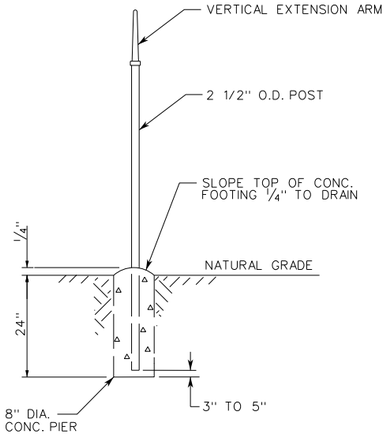

4 — LINE POST DETAIL

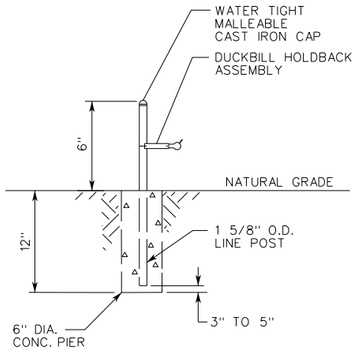

5 — GATE HOLDER DETAIL

CONSTRUCTION NOTES

1. BOTTOM OF FENCE FABRIC SHALL FOLLOW THE CONTOUR OF THE GROUND AND HAVE A MAXIMUM CLEARANCE OF 2-INCHES.
2. 3" O.D. PULL POST SHALL BE INSTALLED ON 300' INTERVALS AND IF THE CHANGE OF GRADE IS MORE THAN 20%.
3. TENSION WIRE SHALL BE FASTENED TO EACH POST WITH 9 GA. ALUMINUM TIE WIRE.

CONFIDENTIAL

THIS PRINT AND THE DESIGN DETAIL SHOWN THEREON IS THE PROPERTY OF GRANGER TELECOM CORPORATION. THIS PRINT IS FURNISHED WITH THE UNDERSTANDING THAT IT IS NOT TO BE REPRODUCED WITHOUT PERMISSION, AND MUST BE RETURNED UPON DEMAND. ALL RIGHTS OF DESIGN ARE RESERVED BY GRANGER TELECOM CORPORATION.

NO	DATE	DESCRIPTION	DWN	CHKD	APP

REVISIONS

GRANGER TELECOM CORPORATION
22 CORGEY RD., PLEASANTON, TX 78604
PHONE: (830) 569-8088 FAX: (830) 569-8091

TYPICAL FENCE DETAILS

DRAWN DWB	DATE 12/05/2007	SCALE NONE	SHEET OF	REV 0
DESIGN DWB	DWG. NO.		CAD FILENAME:	
CHKD SS	PROJECT NO.			
APPR LBT				